

 **AGRI
CHOPPER**

**A POWERFUL & HEAVY DUTY
CHOPPER FOR BIG BALES**



VALMETAL



MAXIMIZING THE VALUE OF YOUR BIG BALES WHILE MAKING HANDLING EASIER!

The Agri-Chopper, mobile or stationary, is a heavy duty high capacity chopper designed to quickly process large volumes of bedding or feeding.

BEDDING

The Agri-Chopper chops big bales of straw, cardboard or paper to make fluffy and spongy bedding. Thanks to its powerful blower, it can be used to spread bedding evenly up to 40' (12 m) in free stall barns, hog barns and poultry barns.

When it comes to bedding, the Agri-Chopper saves both, time and material. It's proven that it takes twice as much compressed straw in comparison to chopped straw to make decent bedding, resulting in lower bedding cost and less manure handling.

FEEDING

Designed to process big bales of hay, round or square, dry or wet (balage), the Agri-Chopper makes short work of big feeding jobs.

Since processed hay is more palatable, cattle consume the entire bale, not just the tasty parts, reducing feeding cost.

For producers who feed T.M.R. (total mixed ration), the Agri-Chopper allows the addition of the exact quantity of chopped hay into every recipe, ensure a more thorough mix, lessen the stress in the mixer and extend mixer's life.

LARGE TUB

The large diameter tub features two (2) large doors to facilitate the loading of big bales when used inside farm buildings.



Inside the tube, two sturdy flippers are spring loaded and retractable. They keep the bale pivoting over the knives and ensure that the tub gets completely emptied.


ADJUSTABLE DEFLECTOR

To direct the flow, the deep sided chute has an adjustable deflector and can be pivoted 360° either manually or from the tractor seat with optional hydraulic controls.

Under the rotor, a 16" (40 cm) diameter auger carries the chopped product into a powerful blower capable of projecting the ration over a distance of more than 40' (12 m) (depending on density, moisture content, etc.).



H-5500: 615 LB (279 KG)
H-5600: 710 LB (322 KG)

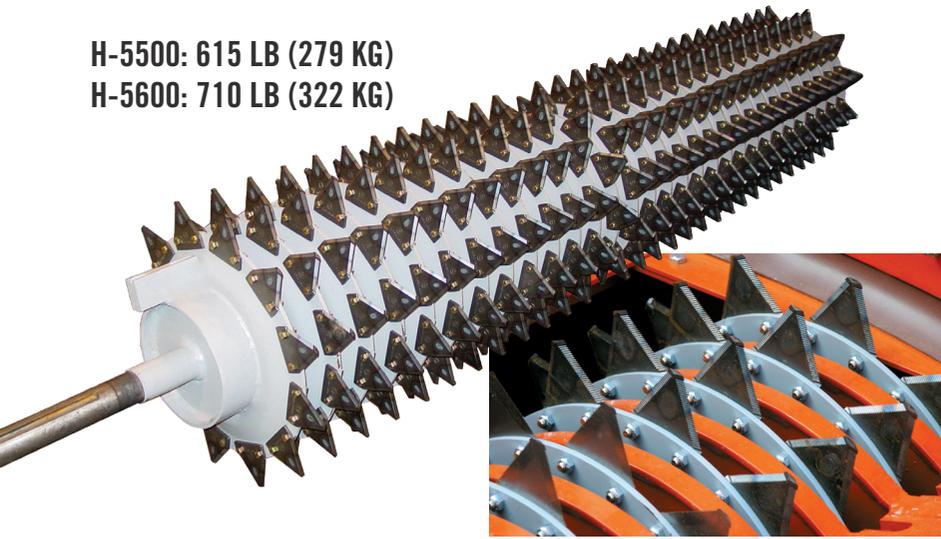

HIGH QUALITY KNIVES

PTO driven, the sturdy rotor features rigid knives. Special blades are used to chop cardboard or paper. The weight of the rotor acts like a flywheel and minimizes stress of the tractor PTO. The large central tube reduces the possibility of twine wrapping.

Many users say they get thousands of bales with one set of knives!



Standard grate

ADJUSTABLE GRATE

The feed grate is adjustable hydraulically with one hand operation from tractor seat.

Extra fine grate



Une extension conique est disponible en option afin d'éviter le débordement de la cuve lors du remplissage avec de longues balles rectangulaires.



Outlet shown with guard removed for illustration only.

MOBILE


Model	H-5500	H-5600
Overall length without chute	150" (381 cm)	162" (412 cm)
Overall length	164" (416 cm)	176" (447 cm)
Overall width	90" (229 cm)	102" (259 cm)
Height without chute	80" (203 cm)	86" (218 cm)
Height with chute	112" (285 cm)	115" (292 cm)
Tub dimension	36" x 84" (91 x 213 cm)	42" x 96" (107 x 244 cm)
Maximum round bale dimension	60" x 60" (152 x 152 cm)	60" x 72" (152 x 183 cm)
Min hp recommended at the PTO	60 hp (45 kW)	70 hp (52 kW)
Blades standard (Qty)	156	180
Blades fine and extra fine cut (Qty)	312	360
Tires size	11L-15F1 (12 ply)	11L-15F1 (12 ply)
Machine weight	5030 lb (2282 kg)	5920 lb (2685 kg)

STATIONARY

Model	H-5500	H-5600
Overall length without chute	142" (361 cm)	154" (391 cm)
Overall length	156" (396 cm)	168" (427 cm)
Overall width	90" (229 cm)	102" (259 cm)
Height without chute	78" (198 cm)	84" (213 cm)
Height with chute	109" (277 cm)	112" (285 cm)
Tub dimension	36" x 84" (91 x 213 cm)	42" x 96" (107 x 244 cm)
Maximum round bale dimension	60" x 60" (152 x 152 cm)	60" x 72" (152 x 183 cm)
Min hp recommended (electric motor)	40 hp (30 kW)	40 hp (30 kW)
Blades standard (Qty)	156	180
Blades fine and extra fine cut (Qty)	312	360
Machine weight	4957 lb (2248 kg)	5834 lb (2646 kg)

Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without prior notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

YOUR LOCAL DEALER:



230, Boulevard Industriel
 Saint-Germain-de-Grantham
 (Québec) J0C 1K0 Canada
 Tel : 819 395-4282
 Fax : 819 395-2030



15497 State Hwy 131
 Tomah, WI 54660
 United States
 Tel : (608) 374-2206
 Fax: (608) 374-2302

info@valmetal.com