



HYDRAUCART

.....

**IDEAL FOR SMALL
SPACES**



**GREAT
HANDLING**

VALMETAL

valmetal.com



HYDRAUCART

532 & 544



The spiral beater regulates the flow of feed and eliminates risks of bridging, no matter the condition of silage

This drive technology and the use of high-quality mechanical components make the Valmetal Hydraucart an extremely effective machine.



The drive wheels are directly driven by two hydraulic motors fed by a sturdy hydrostatic pump, thus eliminating the need for costly and complicated maintenance of a differential or gear box.




Thanks to the ergonomic arrangement of the control levers and pedals, the Hydraucart will make your dairy feeding operation more pleasant and efficient than ever before.

Strategically set close to the center of the bin, they allow very short axis turning in narrow aisles.

Model	Overall length	Overall w/out seat	Overall weight	Overall Height	Box dimensions (interior)	Weight
532	87" (2,20 m)	80" (2,03m)	35" (0,88m)	64" (1,62m)	64" (1,62m) x 30" (0,76m) x 44" (1,11m) top	860 lbs. (390 Kg)
544	93" (2,36m)	87" (2,20m)	39" (0,99m)	64" (1,62m)	70" (1,77m) x 34" (0,86m) x 44" (1,11m) top	940 lbs. (426 kg)


Minimum alley requirements for turning with feed cart

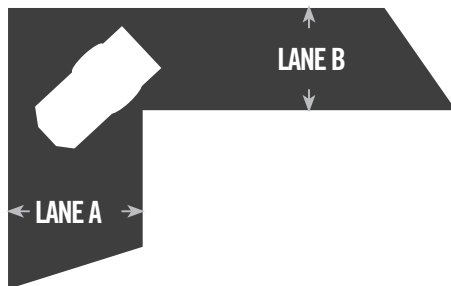

Model 532		Model 544	
A	B	A	B
54" (1,37m)	52" (1,32m)	48" (1,21m)	68" (1,72m)
56" (1,42m)	50" (1,27m)	50" (1,27m)	66" (1,67m)
58" (1,47m)	48" (1,21m)	52" (1,32m)	64" (1,62m)
60" (1,52m)	46" (1,16m)	54" (1,37m)	62" (1,57m)
62" (1,57m)	42" (1,06m)	56" (1,42m)	60" (1,52m)

Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without prior notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

YOUR LOCAL DEALER:



VALMETAL
valmetal.com

Tel : 819 395-4282 • Fax : 819 395-2030 • info@valmetal.com