




VM-250

CENTER-CHARGE FEEDER

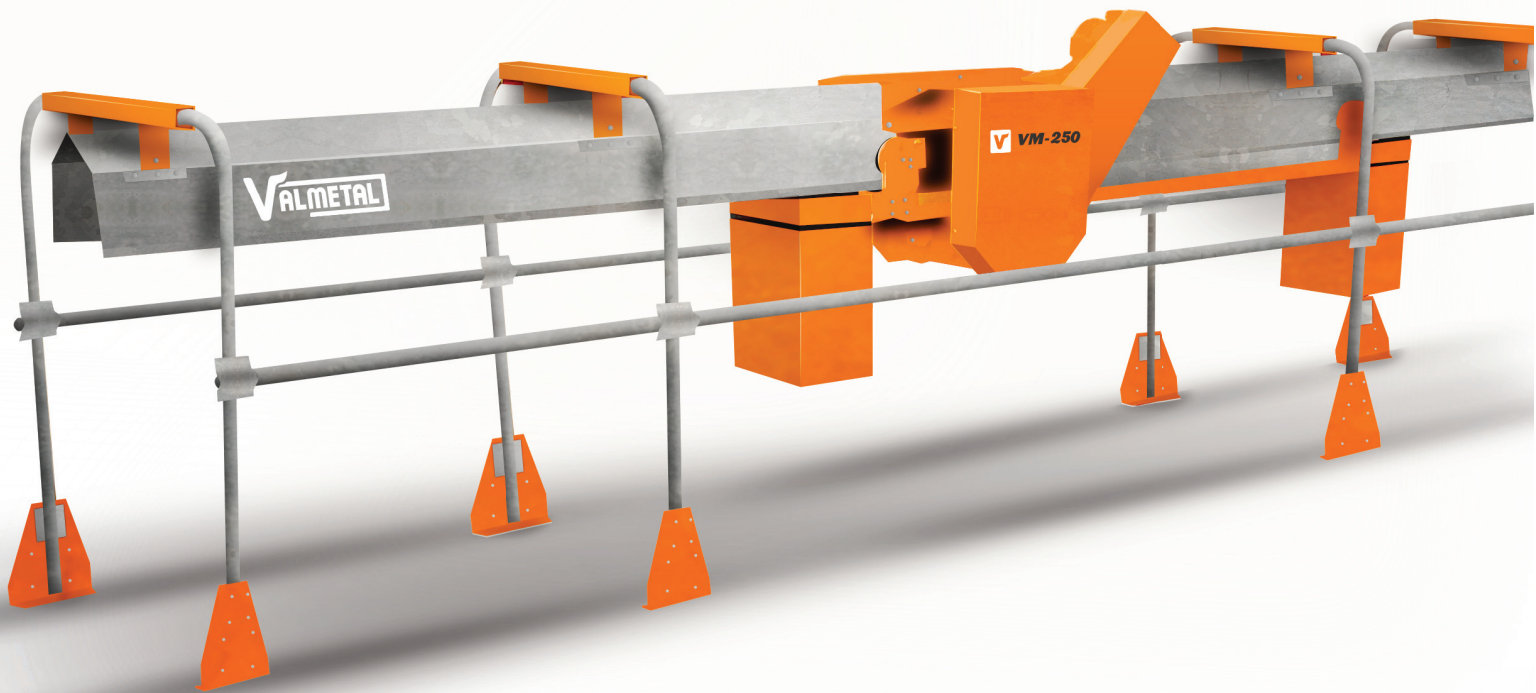

VALMETAL

valmetal.com

MAKE
LIFE BETTER



VM-250


THE ULTIMATE IN SIMPLICITY, THIS SHUTTLE FEEDER HAS BEEN DELIVERING DEPENDABILITY FOR OVER 60 YEARS.

Getting your cows fed is one job that just can't wait. The Valmetal VM-250 feeder is a proven performer, trusted by generations of dairymen to deliver feed with maximum reliability.


Feeders up to 250 feet long run on only 2 HP, making the feeder the most energy efficient choice while the quiet operation is appreciated by cows and owners alike.

THE ENCLOSED HOOD
PROTECTS FEED FROM
WIND OR RAIN.


THE HANGER BRACKETS ARE
EASY TO INSTALL AND MAY BE
SUPPORTED FROM STANDARD
1-5/8" OD STEEL PIPE, 2X6
LUMBER OR FROM VALMETAL
ARCH STANDS (SHOWN).

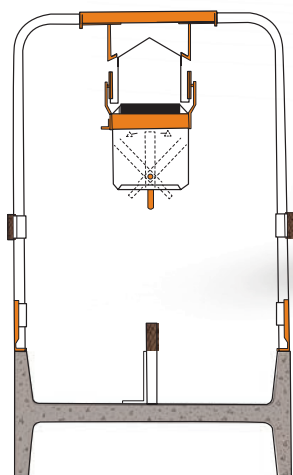

Bunks may be split to feed separate rations on opposite sides using the optional diverter downspout.

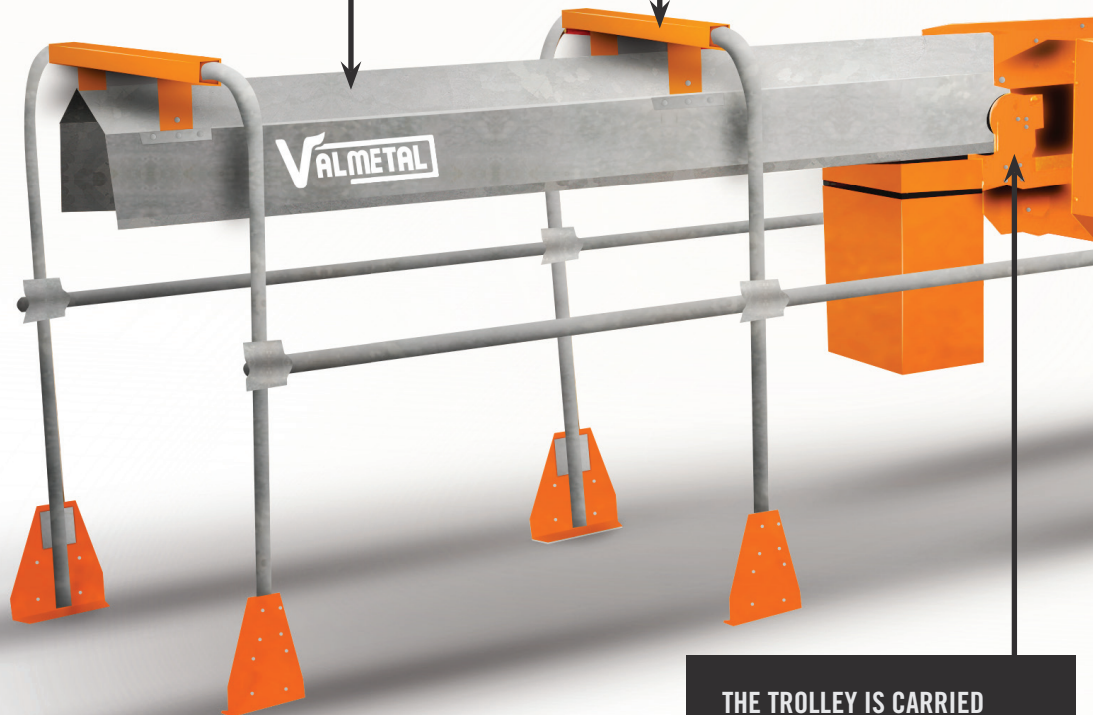

THE TROLLEY IS CARRIED
ON 6" DIAMETER CAST IRON
WHEELS.

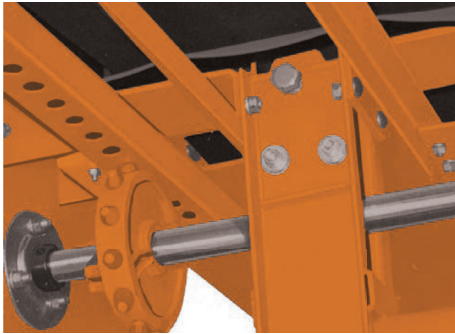

The rack-and-pinion drive for the trolley is simple and dependable. The drive sprocket teeth engage the carriage track for positive no-slip power. The drive is protected by a slip clutch.







Double drive tracks are standard on feeders over 150 feet long.



**OPTIONAL WIND
DOWNSPOUTS FOR
OUTDOOR FEED BUNKS.**

HOW IT WORKS...

Feed passes through the center inlet in the hood sections onto the trolley and is carried forward by the movement of the trolley pan under the stationary belt.

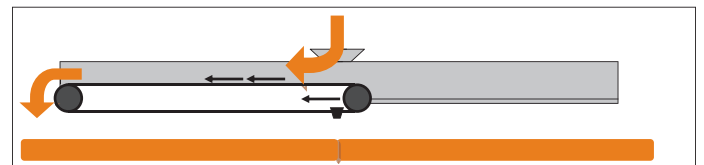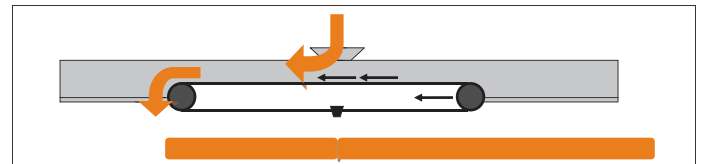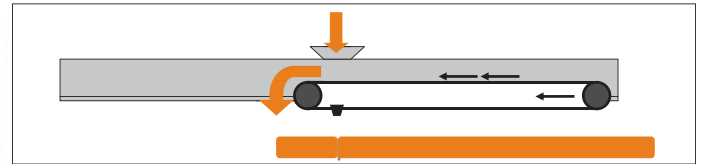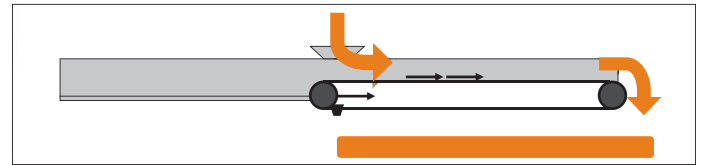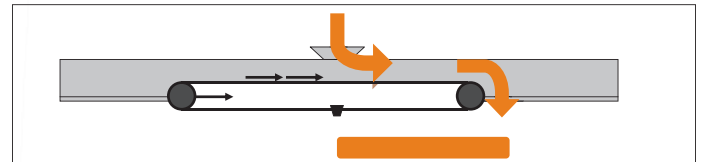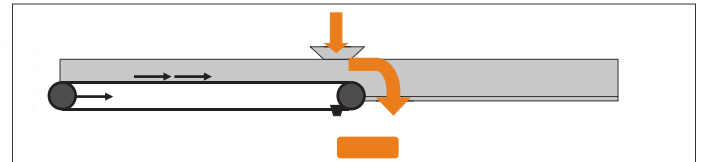


The non-powered belt runs at low tension, meaning long life and easy maintenance.

SPECIFICATIONS

BELT WIDTH	14"
MAXIMUM LENGTH	250' std
MAIN DRIVE	Belt & Chain 2-stage drive
CONVEYOR	No
BELT SPEED	Non-powered
FEEDER	Full length
PLOW DRIVE/FEEDER DRIVE	Rack & pinion

VM-250 FEEDER CONVEYOR

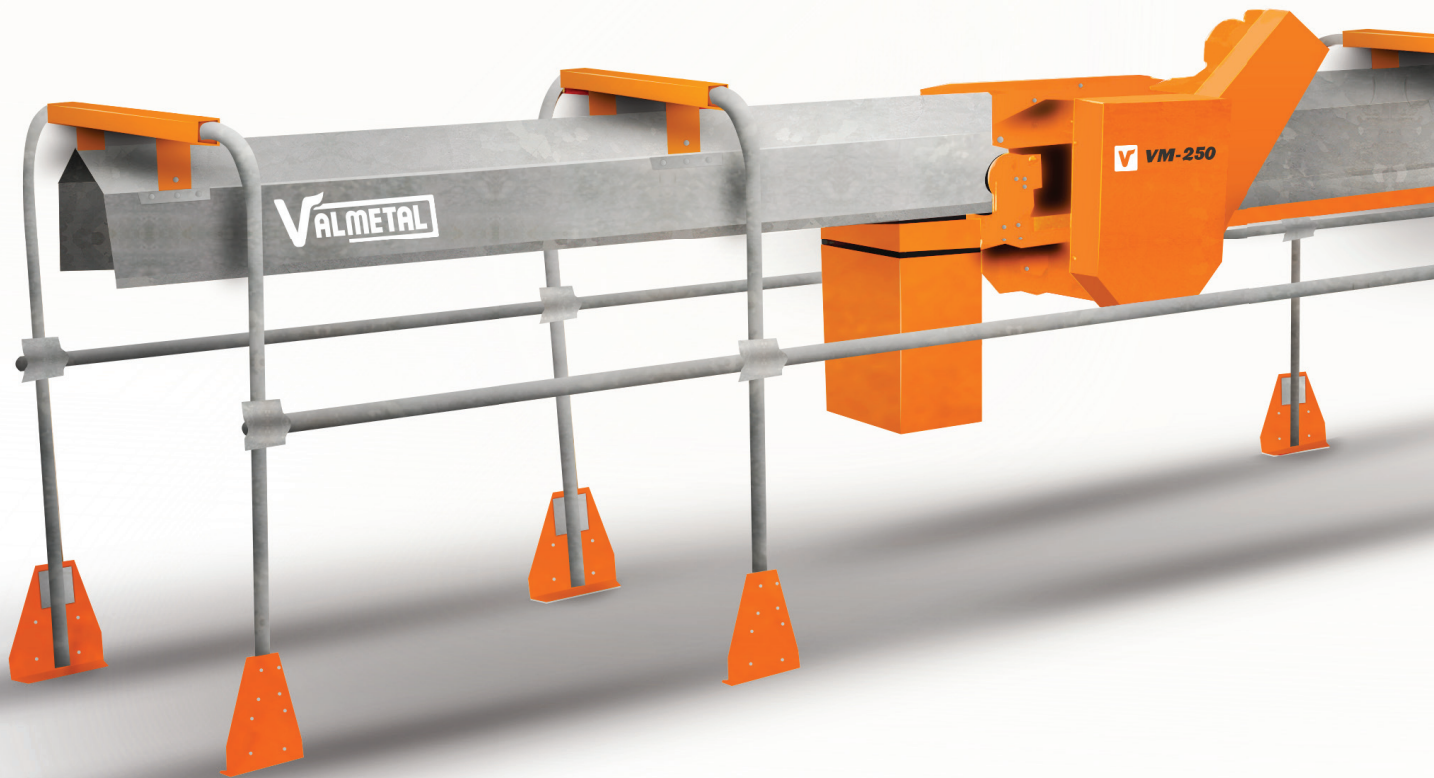

Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without prior notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

YOUR LOCAL DEALER:

VALMETAL

230, Boulevard industriel
Saint-Germain-de-Grantham
(Québec) J0C 1K0 Canada
Tel : 819 395-4282
Fax : 819 395-2030

VALMETAL
USA

15497 State Hwy 131
Tomah, WI 54660
United States
Tel : (608) 374-2206
Fax: (608) 374-2302

info@valmetal.com - valmetal.com