

Submersible chopper pumps

with double chopping system.

HIGH EFFICIENCY

The cast iron volute and blade are designed for maximum efficiency, delivering more flow on less energy.

DOUBLE MECHANICAL SEAL


Double mechanical seals for extra durability, one in silicon-carbide and one in graphite-ceramics.

THERMAL SENSORS

Double thermal sensors in the motor protects against overheating for maximum life.

MOISTURE SENSOR

The safety sensor will stop the unit if any leak is detected, preventing damage to the drive or motor.

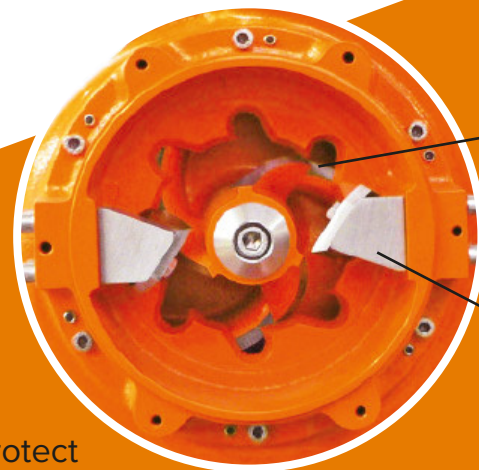

Inner chopping system
Hard-cast notched shear plate.

Outer chopping system
Two replaceable chrome steel blades.

DOUBLE CHOPPING SYSTEM

Aggressive cutting protect against clogging.

Specifications

| | | |
|---------------------|-----------------------|--------------|
| Max capacity | 340 m ³ /h | 1,497 US gpm |
| Head | 21 m | 69 ft |
| Motor power | 4 - 18.5 kW | 5.4 - 26 HP |
| Suction | 150 - 200 mm | 6 - 8 in |
| Discharge | 100 - 150 mm | 4 - 6 in |

Models available

| Power | Motor | Hz |
|-------|----------|------|
| 5 HP | 230-460V | 60Hz |
| 10 HP | 230-460V | 60Hz |
| 15 HP | 230-460V | 60Hz |
| 25 HP | 230-460V | 60Hz |